



Contactor, Definite Purpose, 60A, 3 pole, 30HP at 575VAC, 3 phase, 208/240VAC 60Hz 220VAC 50Hz coil, open

8910DPA63V09

Product availability: Stock - Normally stocked in distribution facility

#### Main

Product or Component Type	Definite Purpose Contactor	
Line Rated Current	60 A	
Number of Poles	3P	
Pole contact composition	3 NO	
Range of Product	DPA	

## Complementary

<u> </u>	
Maximum Horse Power Rating	5 hp 115 V AC, 1 phase
	10 hp 230 V AC, 1 phase
	30 hp 460 V AC, 3 phase
	30 hp 575 V AC, 3 phase
	25 hp 230 V AC, 3 phase
Locked rotor rated current	360 A 277 V AC
	300 A 460 V AC
	240 A 575 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	208240 V AC 60 Hz
	220 V AC 50 Hz
Phase	3 phase
Electrical Connection	Box lugs
	Quick connect terminals

# **Environment**

Product Certifications	UL Recognized
	CSA

# Ordering and shipping details

Category	US1CP1B21346	
Discount Schedule	CP1B	
GTIN	785901080794	
Returnability	Yes	
Country of origin	CN	

# **Packing Units**

Unit Type of Package 1	PCE	
Nbr. of units in pka.	1	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package 1 Height	5.70 in (14.478 cm)
Package 1 Width	8.00 in (20.320 cm)
Package 1 Length	9.00 in (22.860 cm)
Package weight(Lbs)	12.271 lb(US) (5.566 kg)
Unit Type of Package 2	CAR
Number of Units in Package 2	8
Package 2 Height	5.90 in (14.986 cm)
Package 2 Width	8.30 in (21.082 cm)
Package 2 Length	9.00 in (22.860 cm)
Package 2 Weight	13.159 lb(US) (5.969 kg)

# **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

#### **Use Better**


Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant with Exemptions
SCIP Number	9635bca0-88f5-4211-aaa3-d012e1850a41

## **Use Again**

○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

## **Dimensions Drawings**

## **Approximate Dimensions**

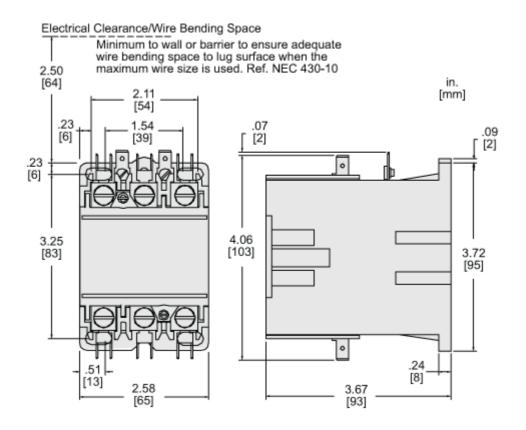

**Technical Illustration** 

# Wiring diagram

